ARSAFETY
MARINE RESCUE SYSTEM
Kristiansund - Norway - arsafety.no - post@arsafety.no

AR Bøyle Storage Bag

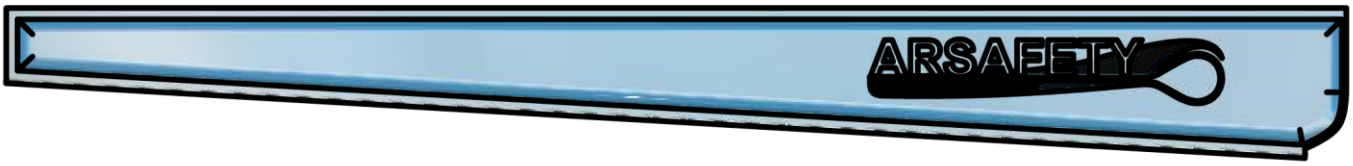

Overall dimensions after installation

Before installation, check that the chosen location accommodates the overall installed dimensions (fig. 1).

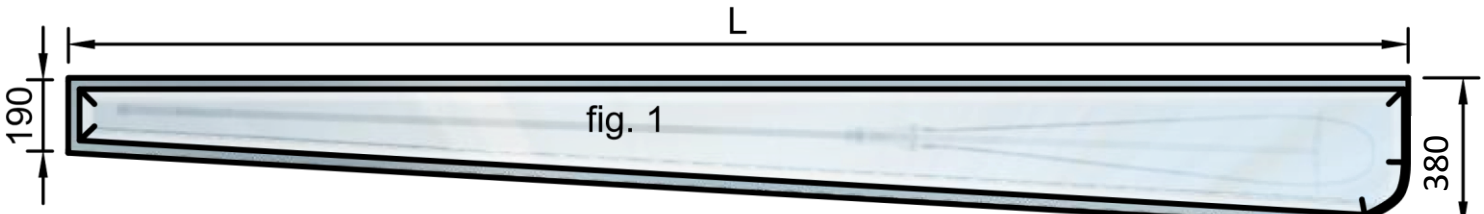

fig. 1

Installing the rails

- Secure the upper rail.
- Position the lower rail using the dimensions in the drawing.
- Secure the lower rail (fig. 2).
- Fit the rails with their openings facing away from each other (fig. 4).

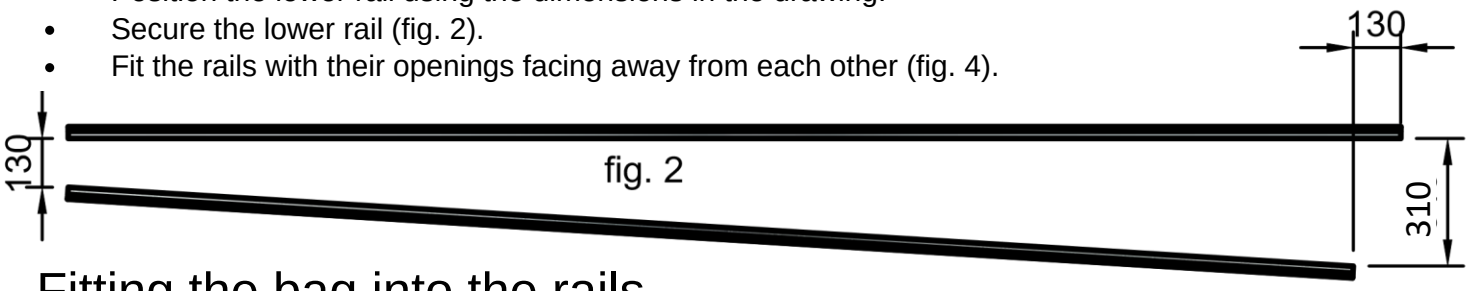

fig. 2

Fitting the bag into the rails

- If the rails are glued in place, wait 24 hours before fitting the bag.
- The bag has a retaining rod along its top and bottom edges. Slide these rods into the upper and lower rails.
- Feed the taller end of the bag into the end where the gap between the rails is smallest (fig. 3). Continue until both retaining rods are fully inside the rails.

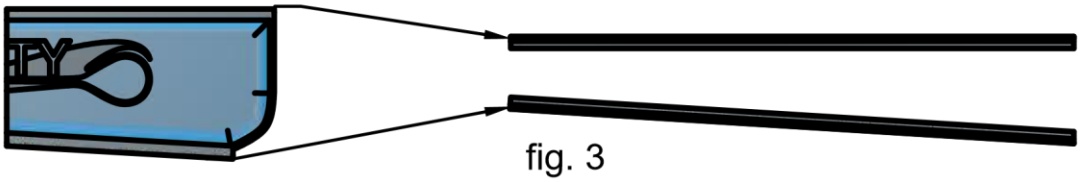

fig. 3

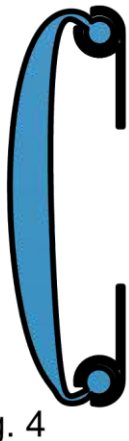

fig. 4

Dimensions

All dimensions shown are the same except for length L (fig. 1), which varies as listed:

ARP 240: L= 2350 mm
ARP 290: L= 2850 mm
ARP 360: L= 3550 mm
ARP 440: L= 4350 mm

ARP 520: L= 5150 mm
ARP 600: L= 5950 mm